



**Features :**

- 4 Digits 7 Segment LED Single Display
- Basic Scalable Indicator
- TC / RTD / Analog Input
- °C / °F Selectable

Certifications :  

**Display Specifications**

Display	4 Digits 7 Segment LED Single Display Height of Display 0.5"
---------	---

**Input Specifications**

Inputs	Thermocouple (J, K, T, R, S) RTD (PT100) DC Analog inputs (0 to 56mV, 0 to 10V, 0 / 4 to 20mA)
Resolution	1 / 0.1° for TC / RTD only ( Fixed 1° resolution for R & S type TC) Decimal point position selectable: 1 / 0.1 / 0.01 / 0.001 for analog input
Indication Accuracy	Temperature : 0.25% of span 1°C (After 20min. Warmup)
Temperature Unit	°C / °F selectable

**Output Specifications**

Sensor Supply	24V DC, 30 mA
---------------	---------------

**Auxiliary Supply Specifications**

Supply Voltage	85 to 270V AC / DC (50 / 60Hz) Optional - 24V DC, ±10%
Power Consumption	5 VA max @ 230V AC


**Environmental Specifications**

Temperature	Operating : 0 to 50°C (32 to 122°F) Storage : -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	95% RH


**Mechanical Specifications**

Mounting	Panel Mount
Weight	250 gms


**Dimensions**

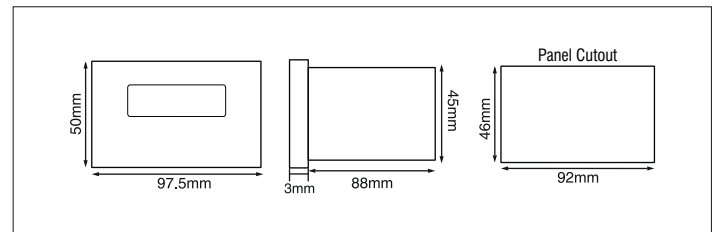

**Terminal Connections**

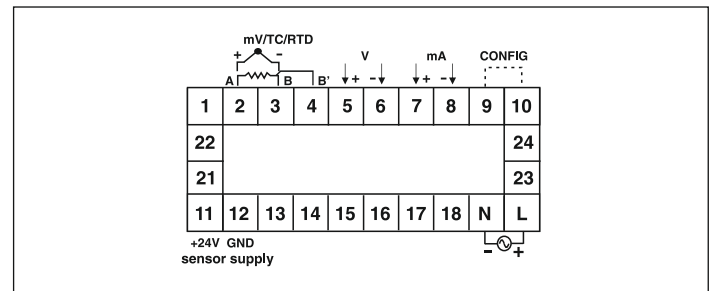

**Ordering Information**

PRODUCT CODE	SUPPLY VOLTAGE	CERTIFICATION
PIC101N	85 - 270V AC / DC	CE
PIC101N-24V	24V AC / DC	CE
PIC101N-CU	85 - 270V AC / DC	CE 

Compliance

Applicable EMI / EMC Standards		
Product Standard : IEC 61326-1		
Category		Standards Compliance
ESD Immunity	IEC 61000-4-2	Level III
Surge Immunity	IEC 61000-4-5	+/- 2 kV common mode, +/- 1 kV differential mode
Radiated Susceptibility	IEC 61000-4-3	Level III, 80 to 1000MHz Level II, 1.4GHz to 2GHz Level I, 2GHz to 2.7GHz
Conducted Susceptibility	IEC 61000-4-6	Level II
Voltage Dips and Interruptions	IEC 61000-4-11	<b>Dips</b> : 0% residual voltage / 1 cycle (Criteria B), 40% residual voltage / 10 cycles 50Hz / 12 cycles 60Hz (Criteria C) 70% residual voltage / 25 cycles 50Hz / 30 cycles 60Hz (Criteria C) <b>Interruptions</b> : 0% residual voltage / 250 cycles 50Hz / 300 cycles 60Hz (Criteria C)
Conducted Emission	CISPR-11	
Radiated Emission	CISPR-11	
Electrical Fast Transient	IEC 61000-4-4	Level III

Mounting Accessories (Supplied with units)

Clamp side with screw assembled
---------------------------------

Input Ranges (For TC/RTD input)

Sensor Type	Resolution	Ranges	
		1	0.1
Pt100	°C	-150 to 850	-150 to 850
	°F	-238 to 1562	-199 to 999
J	°C	-199 to 750	-199 to 750
	°F	-328 to 1382	-199 to 999
K	°C	-199 to 1350	-199 to 999
	°F	-328 to 2462	-199 to 999
T	°C	-199 to 400	-199 to 400
	°F	-328 to 750	-199 to 750
R & S	°C	0 to 1750	N/A
	°F	32 to 3182	N/A